



# GPL 12750

## 12V 75.0Ah

GPL 12750 is a general purpose battery with 10 years expected life under normal float charge. As with all CSB batteries, all are rechargeable, highly efficient, leak proof and maintenance free.




### Specification

Cells Per Unit	6
Voltage Per Unit	75Ah @ 20hr-rate to 1.75V per cell @25°C(77°F)
Capacity	Approx. 27.5kg(60.6 lbs)
Weight	600A(5sec)
Maximum Discharge Current	Approx. 4.5mΩ
Internal Resistance	Discharge: -20°C ~50°C (-4°F~122°F)
Operating Temperature Range	Charge: 0°C ~40°C (32°F~104°F) Storage: -20°C ~40°C (-4°F~104°F) 25°C±3°C (77°F±5°F)
Nominal Operating Temperature Range	13.5 to 13.8 VDC/unit Average at 25°C(77°F)
Float Charging Voltage	22.5A
Recommended Maximum Charging Current Limit	14.4 to 15.0 VDC/unit Average at 25°C(77°F)
Equalization and Cycle Service	CSB Batteries can be stored for more than 6 months at 25°C (77°F). Please charge batteries before using. For higher temperatures the time interval will be shorter.
Self Discharge	Thread Insert & Bolt
Terminal	-ABS (UL94-HB)*Flammability resistance of UL94-V2
Container Material	can be available upon request.



CSB-manufactured batteries are UL-recognized components under UL924 and UL1989. CSB is also certified by ISO 9001 and ISO 14001.

### Dimensions

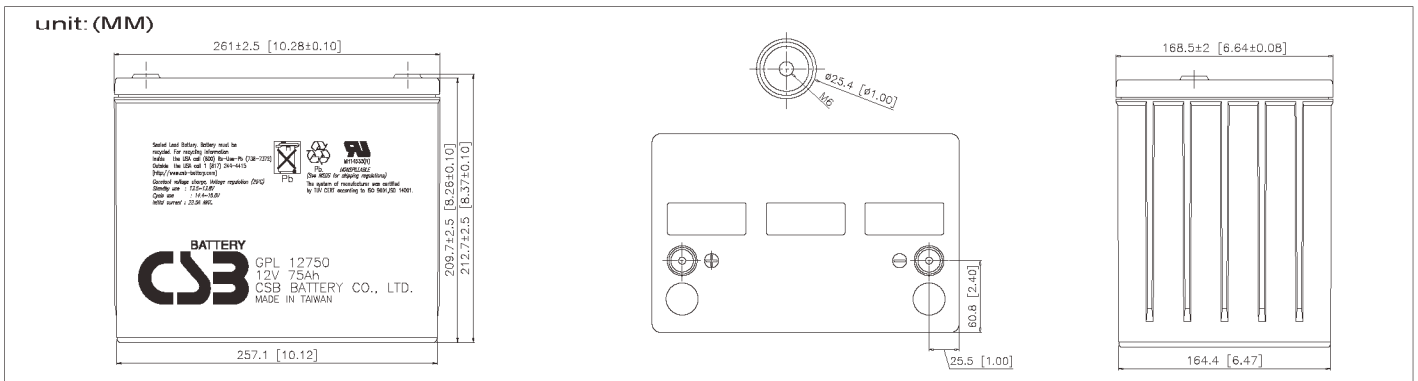

### Constant Current Discharge Characteristics Unit:A(25°C,77°F)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	325.0	215.0	158.0	93.3	53.4	31.0	21.5	16.7	14.4	9.36	7.85	4.45
1.67V	305.0	202.5	154.0	91.7	52.8	30.7	21.3	16.6	14.3	9.32	7.74	4.43
1.70V	285.0	190.0	150.0	90.0	52.2	30.3	21.0	16.5	14.2	9.28	7.62	4.41
1.75V	252.5	175.0	144.0	85.4	50.7	29.8	20.6	16.2	14.0	9.11	7.56	4.33
1.80V	220.0	160.0	138.0	80.8	49.2	29.3	20.2	15.9	13.7	8.93	7.50	4.24
1.83V	200.5	151.0	134.4	78.0	48.3	29.0	20.0	15.7	13.6	8.83	7.46	4.19

### Constant Power Discharge Characteristics Unit:Watt(25°C,77°F)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	3420	2370	1720	1070	623.0	363.0	253.0	197.0	170.0	112.0	94.7	53.2
1.67V	3245	2235	1680	1050	617.0	360.5	250.5	196.5	169.5	111.5	94.6	53.0
1.70V	3070	2100	1640	1030	611.0	358.0	248.0	196.0	169.0	111.0	94.4	52.8
1.75V	2760	1935	1585	983.0	595.5	352.5	244.0	192.5	166.0	109.0	92.7	51.9
1.80V	2450	1770	1530	936.0	580.0	347.0	240.0	189.0	163.0	107.0	90.9	51.0
1.83V	2264	1671	1497	907.8	570.7	343.7	237.6	186.9	161.2	105.8	89.9	50.5

● All mentioned values are average values.


## Trickle (or Float) Service Life

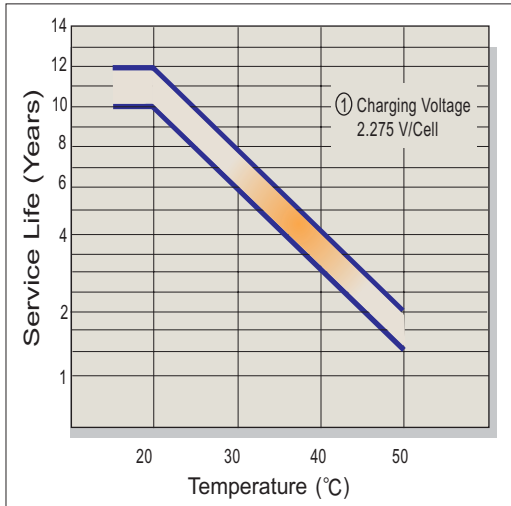


## Capacity Retention Characteristic

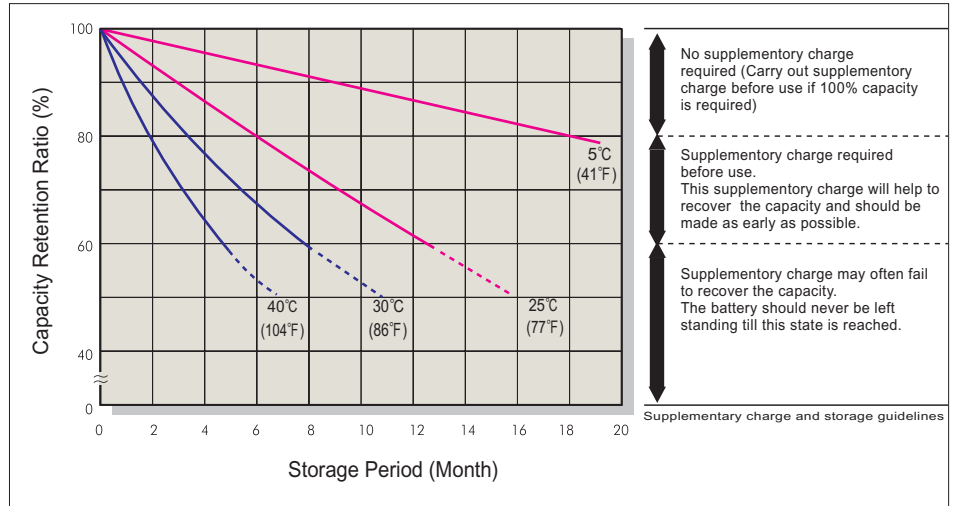


## Battery Voltage and Charge Time for Standby Use

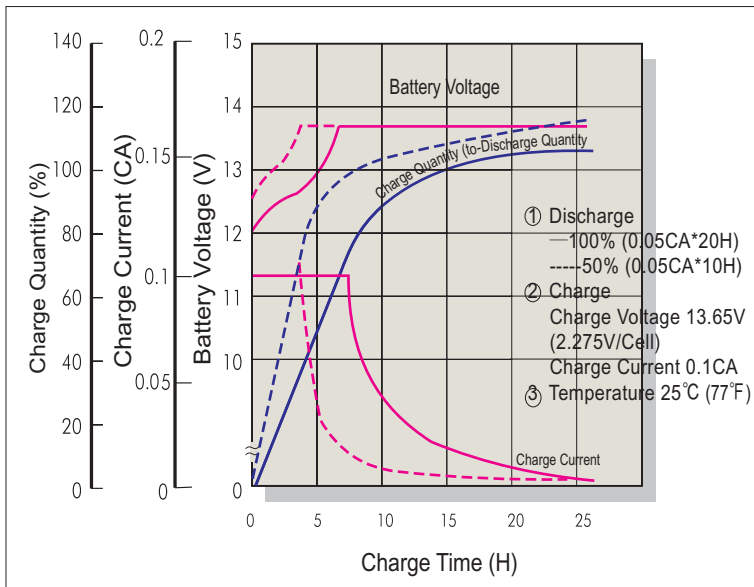

## Terminal Voltage (V) and Discharge Time (25°C 77°F)

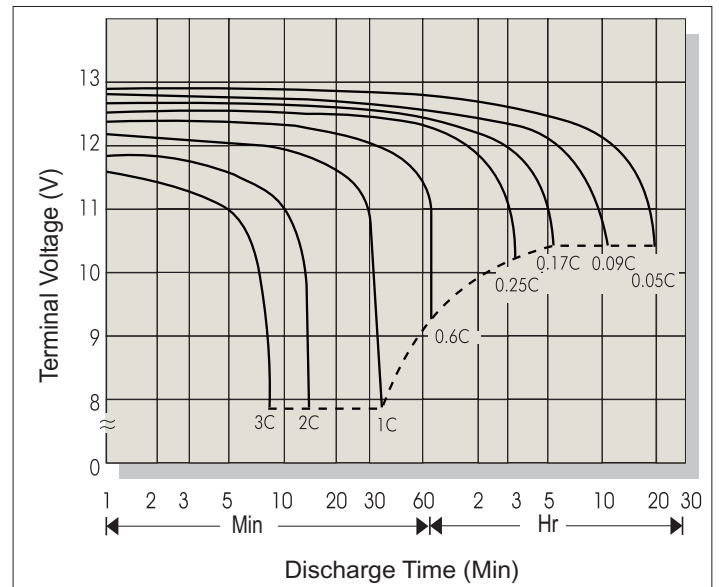

## Battery Voltage and Charge Time for Cycle Use

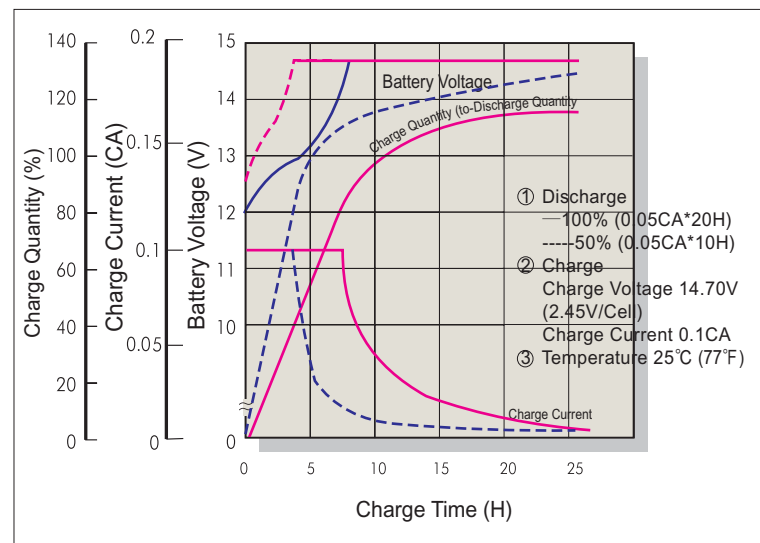

## Discharge Current VS. Discharge Voltage

Discharge Current (A)	0.2C > (A)	0.2C < (A) < 0.5C	0.5C < (A) < 1.0C	(A) > 1.0C
Final Discharge Voltage V/Cell	1.75	1.70	1.55	1.30

## Charging Procedures

Application	Charge Voltage (V/Cell)			Max. Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C (77°F)	2.45	2.40-2.50	0.3CA
Standby	25°C (77°F)	2.275	2.25-2.30	