



(VRLA)



(AGM)



10

99%.
99.7%.
100%

	6
	12
	6
	600
	3366
	4.10 25°C
	32.6
	1.300
25° , 1.75 -	91.0 (20) 82.4 (8)
	+20° +25°
	: -40° +60° : -40° +50°
	13.5 13.8 25°
	C/4 100%
	1.5%
	6 25°

TC-12100S

UL 1778;
28%.

DOT - CFR

49,

171-189.




IMDG

27.

IATA/ ICAO,

A67.

	25°									
	5	10	15	20	30	40	45	50	60	90
1.60	3371	2501	1930	1579	1170	939	865	791	688	502
1.67	3257	2454	1909	1564	1161	933	860	787	685	501
1.70	3207	2436	1896	1555	1157	930	857	785	684	497
1.75	3041	2293	1827	1525	1146	922	850	778	678	496

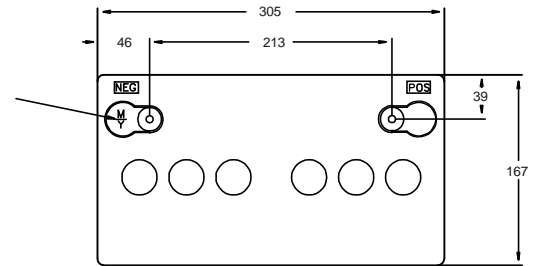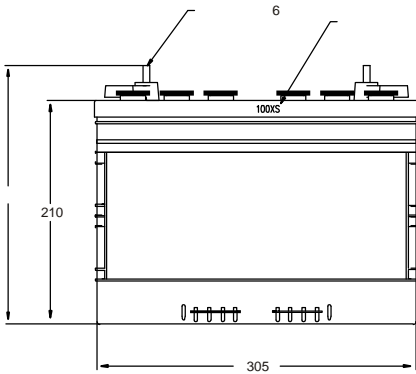

POWER BATTERY

UL CUL.



CR3

PRC/TC-12100S					
KS5	2	381	635	400	85.8
KS6	4	406	876	451	166.8
KS7	8	406	876	946	333
CR1	12	610	826	1092	567.5
CR3	20	1016	826	1092	810.9
CR6	30	1016	826	1524	1195
CR4	40	1016	826	1956	1579.1

25°										
	1	2	3	4	5	6	8	10	12	24
1.75	57.1	33.2	24.1	19.0	15.6	13.3	10.3	8.40	7.17	3.87
1.80	56.3	32.9	23.9	18.6	15.4	13.1	10.2	8.35	7.11	3.82
1.85	54.1	32.0	23.1	18.0	14.9	12.7	9.80	8.07	6.86	3.69
1.90	49.7	29.9	21.7	17.0	14.0	11.9	9.10	7.46	6.28	3.41